

BH1002

SMART LIVE BROADCAST MACHINE



Multifunction
interface



Diversion
Three displays



Easy to expand



The intelligent live broadcast machine adopts the Rockchip RK3588 motherboard with a triple-core structure of up to 6.0Tops. 8K encoding + 8K decoding, flexible allocation of computing power, support for various precision operations, MAC utilization rate increased by 20% compared with the previous generation, DDR bandwidth reduced by 30%, continuous update and perfect OP and other advantages. 8G memory + 128G built-in memory, running a variety of programs at the same time without lag, powerful performance 8-core flagship chip, specially designed for high-end applications in 8K scenarios. Rich expandable interfaces, integrated 10+ external expansion interfaces, 4+ wireless connections.

The built-in live broadcast software integrates 5 major functional modules including scene template, camera position, multi-opening, material, and pendant. A director station that can realize green screen + AI keying virtual background, zero-cost massive scene templates, multi-camera, multi-angle switching lenses at will. Massive pendant materials and sound effects are free to use, vertical screen and horizontal screen switching, professional teleprompter, etc., which can realize synchronous live broadcast on multiple platforms such as Douyin, Volcano, Taobao, Douyu, Huya, Facebook, You tube, Talk, and video account, and there is no push stream address. Start broadcasting with one click.


The intelligent live broadcast machine can cover all live broadcast scenarios and meet the needs of multiple types of business. Application scenarios: use RFID technology to automatically display the information of sold products, analyze data during the live broadcast, and automatically match the live broadcast room scene; according to big data algorithms, fan portrait analysis, fans Value ranking, VIP fan entry reminder, etc., to explore the value of live broadcast and fans; live broadcast while playing games, and deeply participate in fan interaction; multiple file formats of courseware are projected on the screen, and one person can complete professional course recording. "




**ENTERPRISE-LEVEL DESKTOP
LIVE BROADCAST SOLUTION**
Highly integrated intelligent interaction
MODEL: BH1002

Shenzhen Bihuo Intelligent Information Technology Co., Ltd.
Address: 10th Floor, Building 2, Baiwang R&D Building,
No. 5308, Shahe West Road, Nanshan District, Shenzhen, China
Tel: +86(0755)-61885156 Fax: +86(0755)-61827962 Business Tel: 186 6587 2531
Complain Tel: 158 2945 5388 Product service: 186 6587 2531
After-sales Complaint Email: michael@soten.com.cn

APPEARANCE

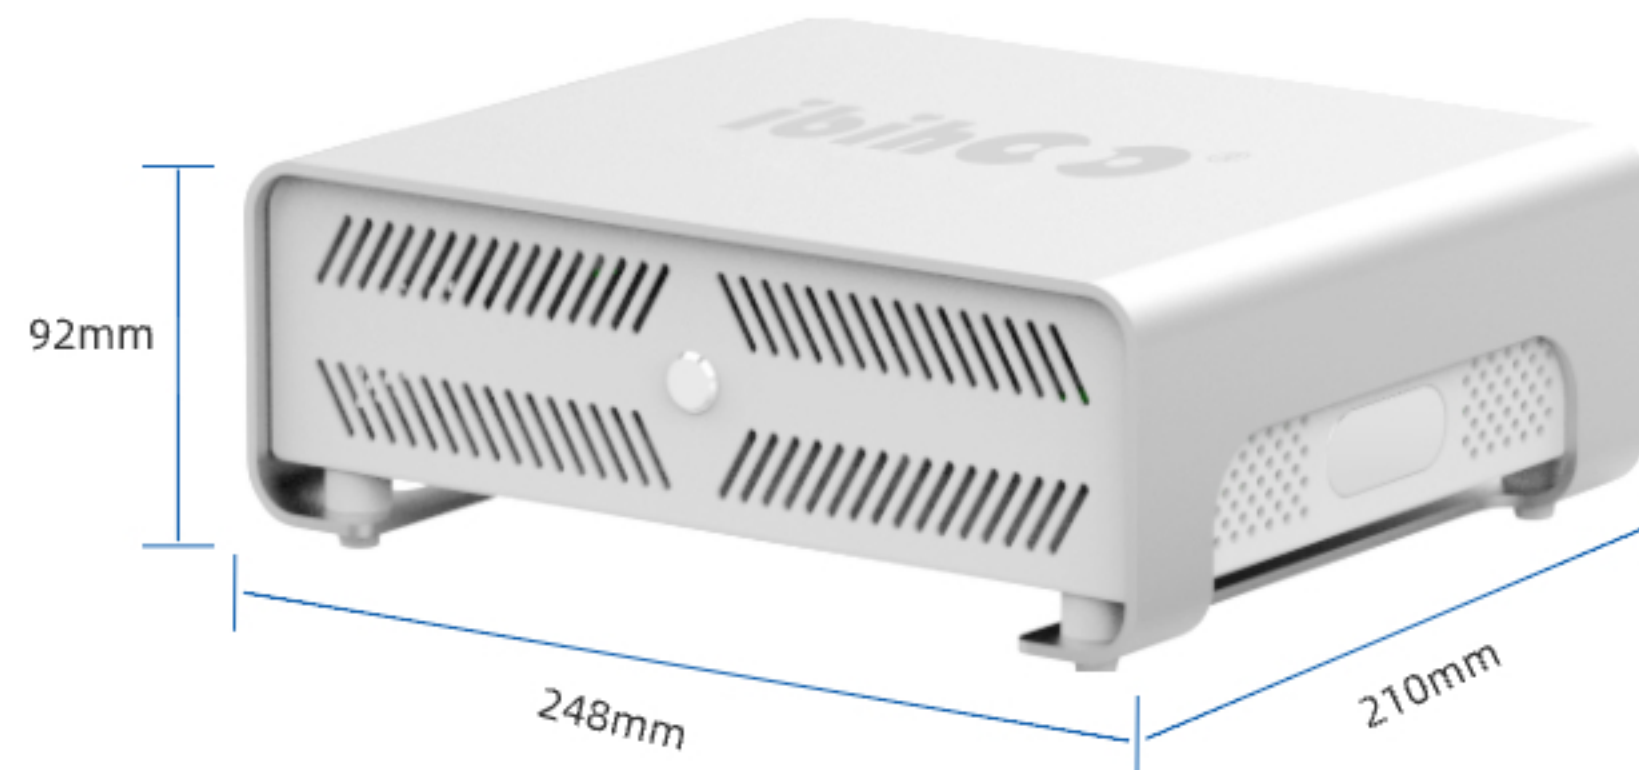

Model: BH1002

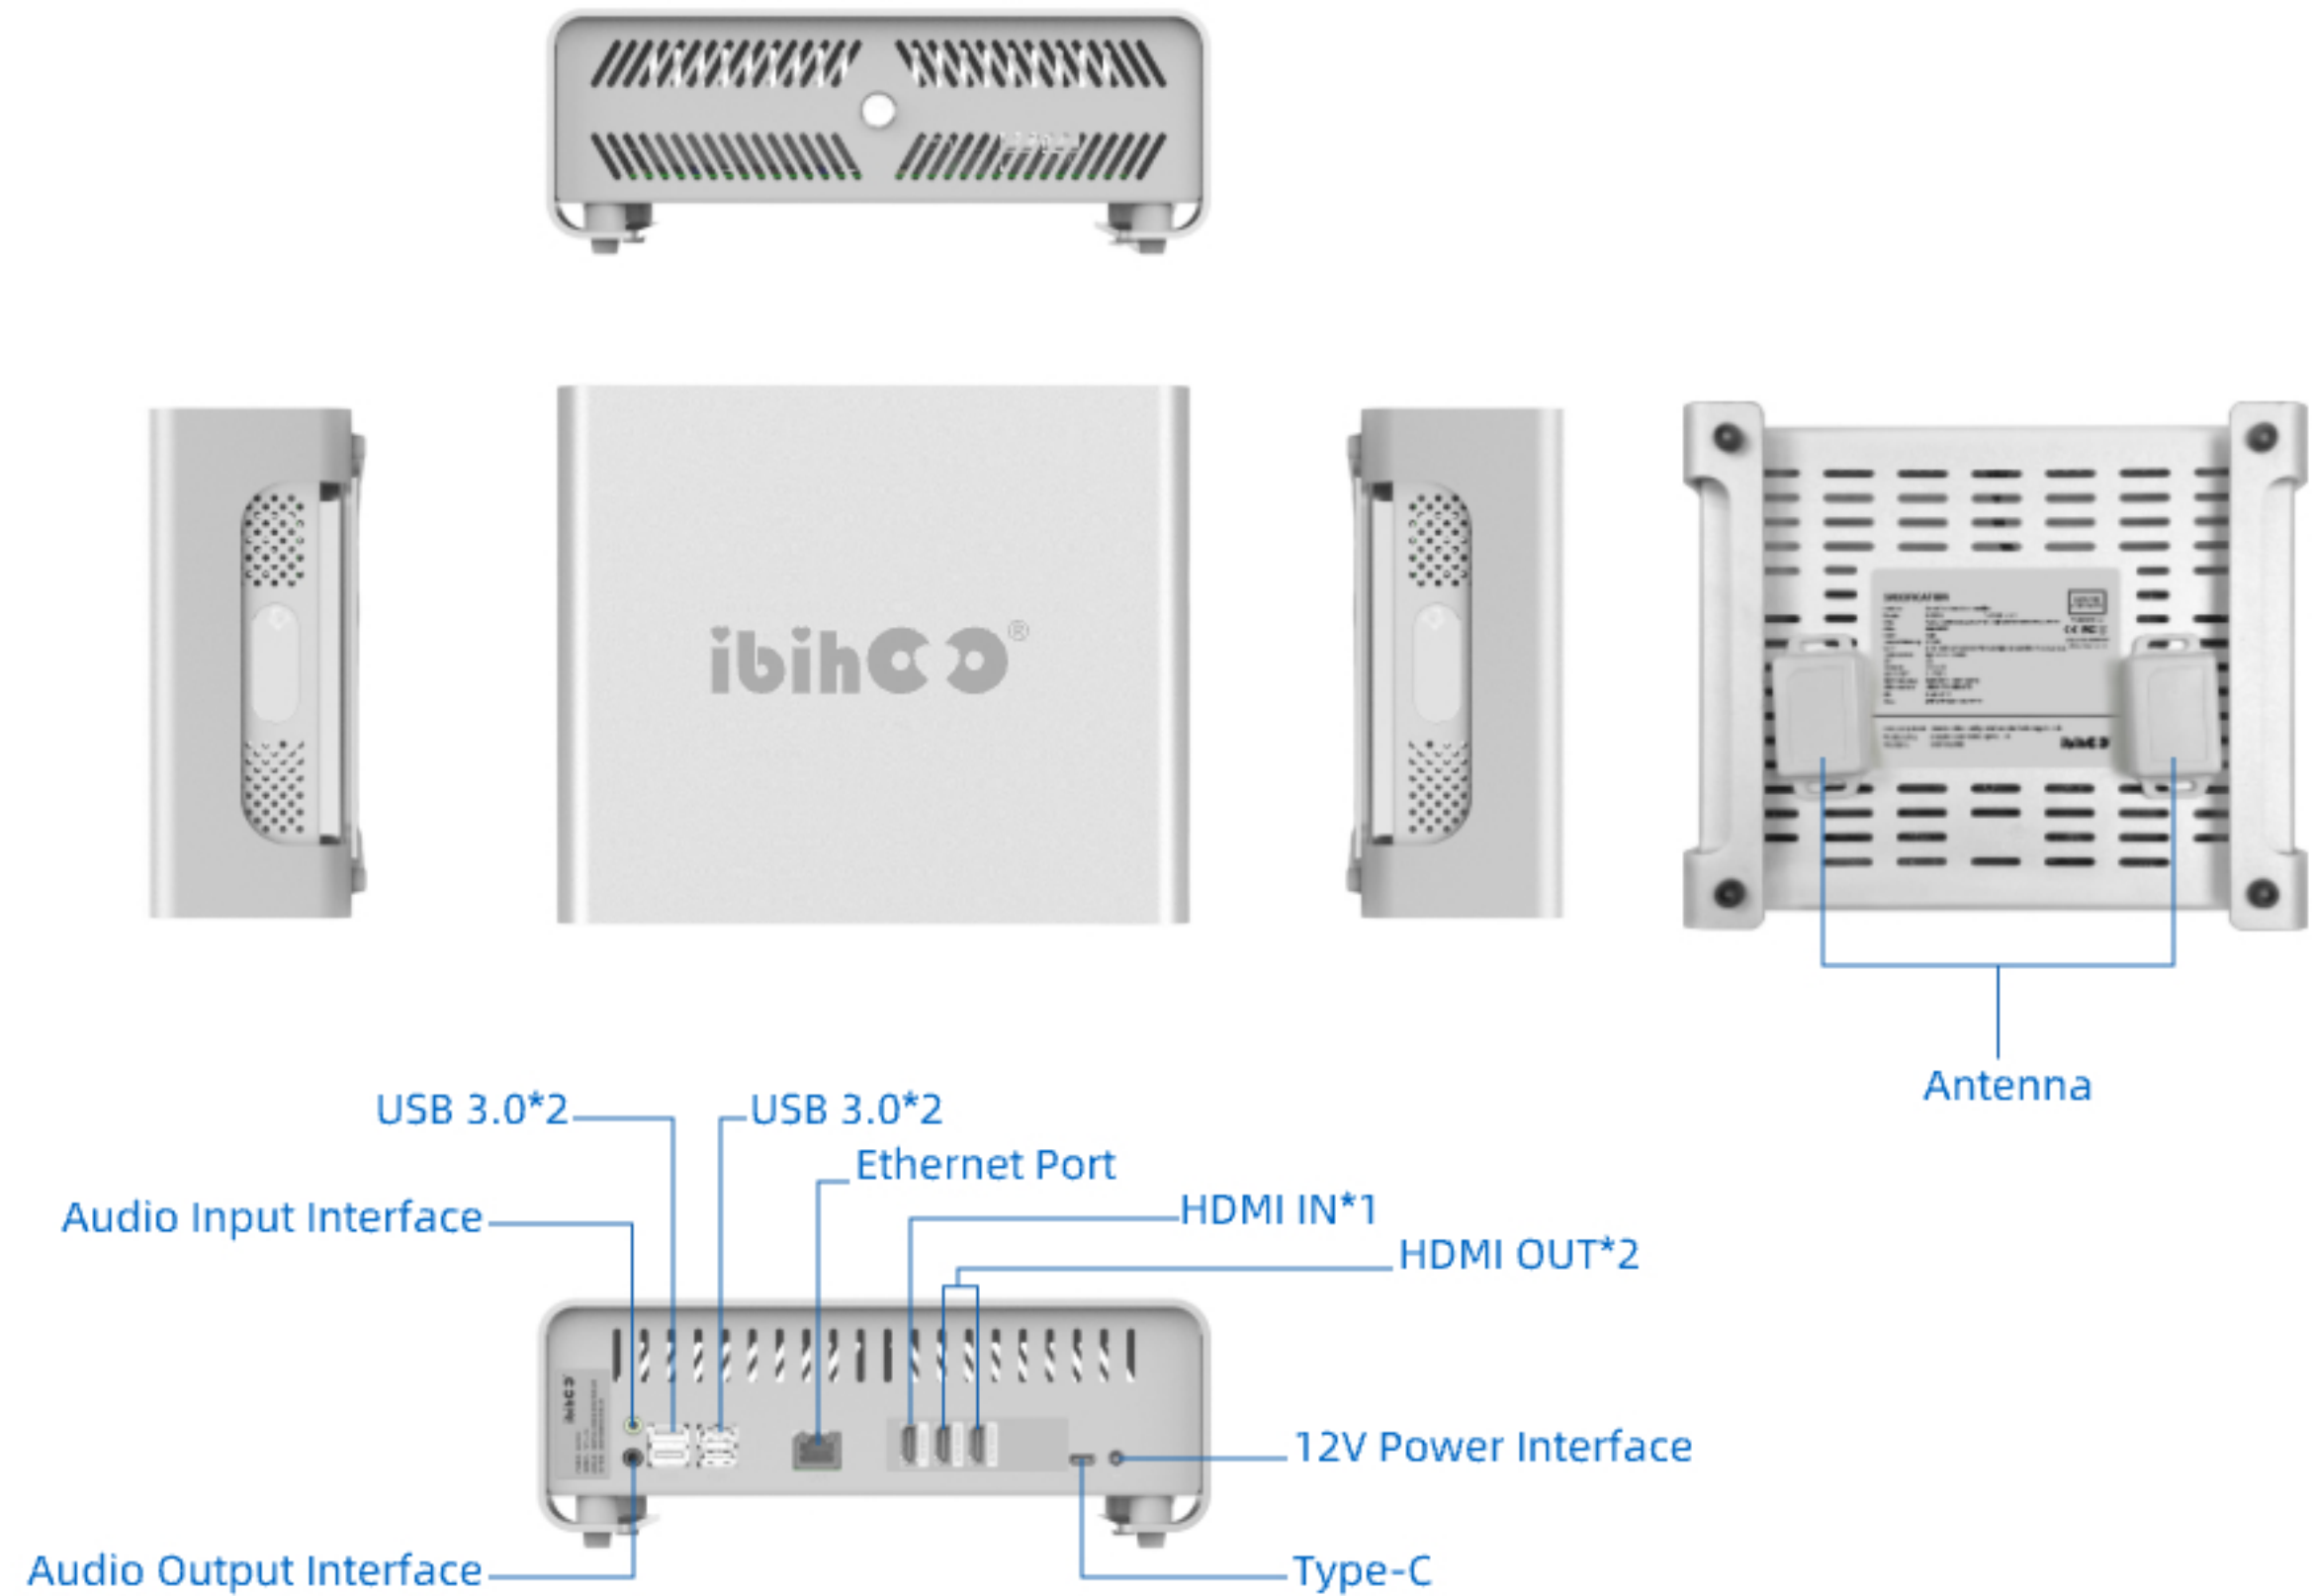

SPECIFICATIONS

Model: BH1002

Hardware		Interface/Networking	
Processor	Rockchip RK3588	DC Interface	DC 12V=5A
CPU	Rockchip RK3588 up to 64-bit high-performance CPU, 2.4GHz	MIC Interface	3.5mm
GPU	Mali-G610	Headphone jack	3.5mm
ARM	8GB	USB	USB 3.0*4
Internal Memory	128GB	Type-C	support
Size	248*210*92(mm) (L×W×H)	HDMI IN	support
Color & Material	Silver grey	HDMI OUT	support
OS	Android 12	Ethernet	RJ45 100M~1000M
		BT	BT 5.0 Dual Antenna
		WIFI	WIFI 6



**ENTERPRISE-LEVEL DESKTOP
LIVE BROADCAST SOLUTION**
Highly integrated intelligent interaction
MODEL: BH1002

Shenzhen Bihuo Intelligent Information Technology Co., Ltd.
Address: 10th Floor, Building 2, Baiwang R&D Building,
No. 5308, Shahe West Road, Nanshan District, Shenzhen, China
Tel: +86(0755)-61885156 Fax: +86(0755)-61827962 Business Tel: 186 6587 2531
Complain Tel: 158 2945 5388 Product service: 186 6587 2531
After-sales Complaint Email: michael@soten.com.cn

USAGE SCENARIO (OUTPUT SCHEME 1)

SMALL LIVE BROADCAST

HDMI OUT X1

Single screen display output



**ENTERPRISE-LEVEL DESKTOP
LIVE BROADCAST SOLUTION**
Highly integrated intelligent interaction
MODEL: BH1001

Shenzhen Bihuo Intelligent Information Technology Co., Ltd.
Address: 10th Floor, Building 2, Baiwang R&D Building,
No. 5308, Shahe West Road, Nanshan District, Shenzhen, China
Tel: +86(0755)-61885156 Fax: +86(0755)-61827962 Business Tel: 186 6587 2531
Complain Tel: 158 2945 5388 Product service: 186 6587 2531
After-sales Complaint Email: michael@soten.com.cn

USAGE SCENARIO (OUTPUT SCHEME 2)

MEDIUM LIVE

HDMI OUT X2
Dual screen display output




**ENTERPRISE-LEVEL DESKTOP
LIVE BROADCAST SOLUTION**
Highly integrated intelligent interaction
MODEL: BH1002

Shenzhen Bihuo Intelligent Information Technology Co., Ltd.
Address: 10th Floor, Building 2, Baiwang R&D Building,
No. 5308, Shahe West Road, Nanshan District, Shenzhen, China
Tel: +86(0755)-61885156 Fax: +86(0755)-61827962 Business Tel: 186 6587 2531
Complain Tel: 158 2945 5388 Product service: 186 6587 2531
After-sales Complaint Email: michael@soten.com.cn

USAGE SCENARIO (OUTPUT SCHEME 3)

LARGE LIVE BROADCAST

HDMI IN X1, HDMI OUT X2
Dual screen display output

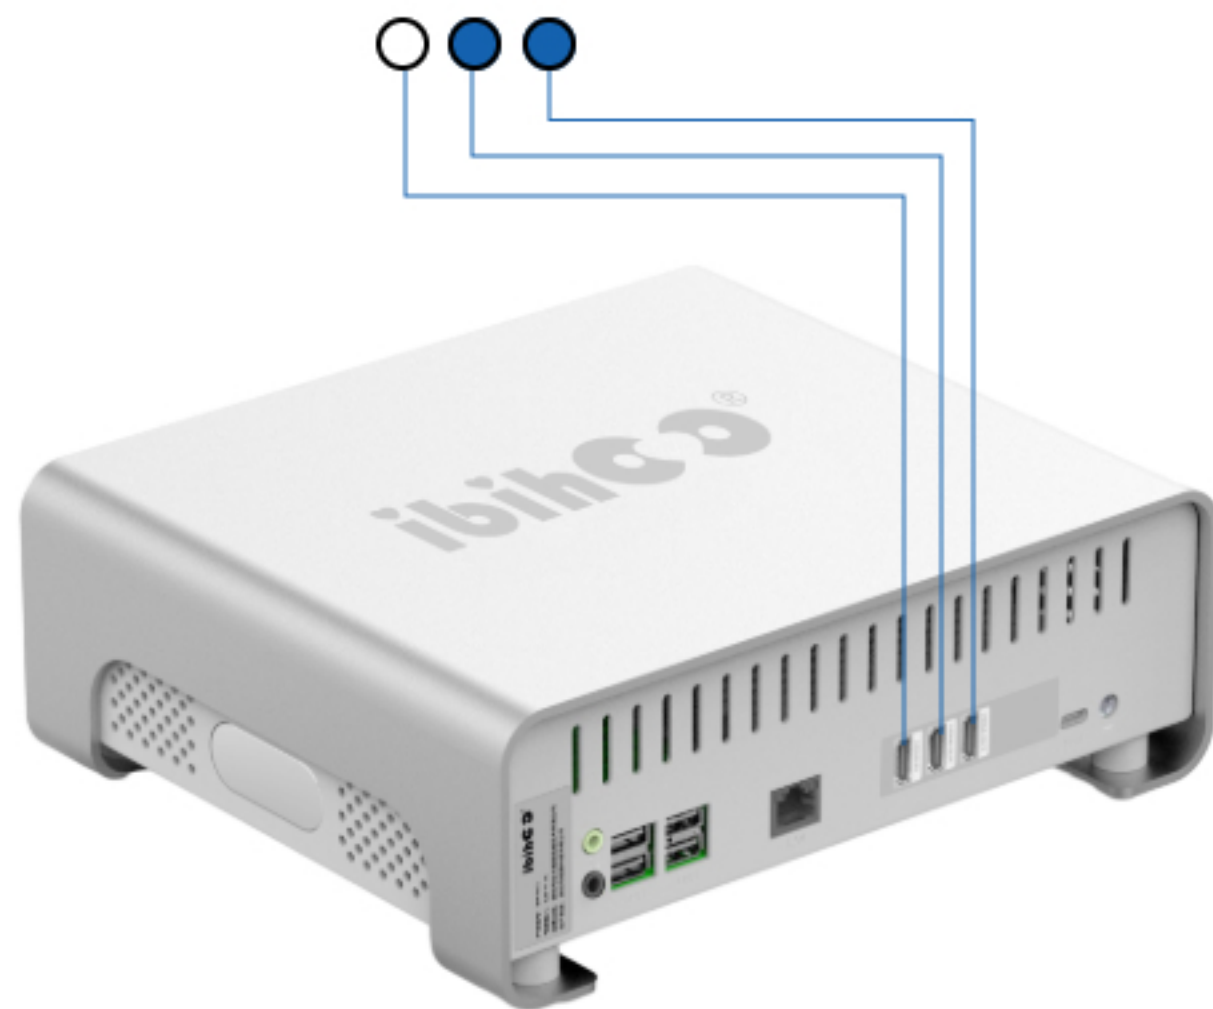

**ENTERPRISE-LEVEL DESKTOP
LIVE BROADCAST SOLUTION**
Highly integrated intelligent interaction
MODEL: BH1002

Shenzhen Bihuo Intelligent Information Technology Co., Ltd.
Address: 10th Floor, Building 2, Baiwang R&D Building,
No. 5308, Shahe West Road, Nanshan District, Shenzhen, China
Tel: +86(0755)-61885156 Fax: +86(0755)-61827962 Business Tel: 186 6587 2531
Complain Tel: 158 2945 5388 Product service: 186 6587 2531
After-sales Complaint Email: michael@soten.com.cn